# **RF292A4PCCDP Datasheet**




## Product Name // 2.92mm Plug Straight 4 Hole Flange RF Connector

View Product Page

#### \* Representative product image only



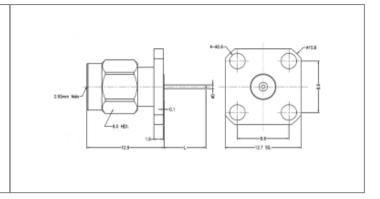

#### // Product Description:

- O 2.92mm Plug Straight 4 Hole Flange RF Connector
- Maximum Voltage: 250V
- C Temperature range: -40°C to +85°C
- O Frecuency range: 0GHz 40GHz
- O VSWR: <1.25

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

#### // General Information:

**Product Display Title:** 

**Product Family:** 

**Product Series: Body Length:** 

**Body Material:** 

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

**Durability:** 

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency:

Pin Diameter: Pin Length: Thread Size: Voltage Max: Vswr:

2.92mm Series Pin without Extended PTFE 4 Hole Flange

Radio Frequency Connectors

2.92mm Series

12.90mm

Stainless Steel Passivation

>20N

Beryllium Copper

0.80Nm

1.10Nm >750V

>500 cycles

12.70mm

Male Flange Mount RF Connector

50Ohm >5000MOhm

**ULTEM 1000** +85°C

-40°C

8.60mm

0GHz 40GHz

0.64mm

10.92mm

1/4 36UNS 2A

250V

<1.25

### // Product PDF Links



2.92mm Series Product Datasheet

### // Product 3D CAD Model Links



RF292A4PCCDP3D CAD Model