RF292AJC Datasheet




Product Name // 2.92mm Straight Jack RF Connector

View Product Page

* Representative product image only



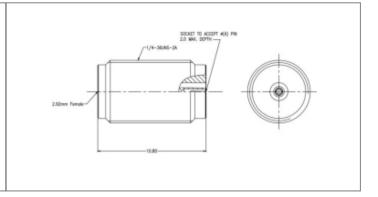

// Product Description:

- 2.92mm Straight Jack RF Connector
- Maximum Voltage: 250V
- O Temperature range: -65°C to +165°C
- 0 Frecuency range: 0GHz - 40GHz
- VSWR: <1.30

- Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- Contact Material: Beryllium Copper

// General Information:

Product Display Title:

Product Family:

Product Series: Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material: Min Coupling Torque:

Max Coupling Torque: Dielectric Withstanding Voltage:

Durability: Function:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency: Socket Diameter: Thread Size:

Voltage Max:

2.92mm Series Straight Connector Radio Frequency Connectors

2.92mm Series

10.80mm

Stainless Steel Passivation

>20N

Beryllium Copper

0.80Nm 1.10Nm >750V >500 cycles

Female to Female RF Connector

50Ohm >5000MOhm

UNFILLED ULTEM 1000/PEI

+165°C -65°C 0GHz 40GHz 0.38mm 1/4 36UNS 2A 250V

<1.30

// Product PDF Links

2.92mm Series Product Datasheet

// Product 3D CAD Model Links

RF292AJC3D CAD Model