
RF292CPB Datasheet



Product Name // 2.92mm Plug Edge Launch PCB RF

🚯 View Product Page

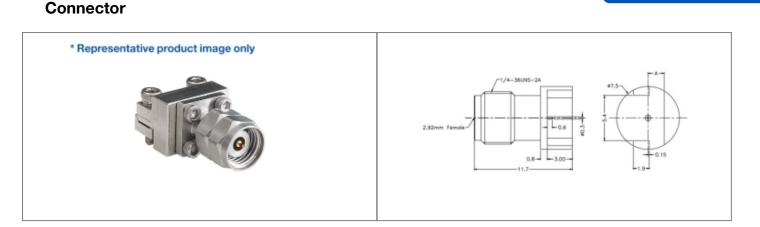

// Product Description:

- O 2.92mm Plug Edge Launch PCB RF Connector
- O Maximum Voltage: 250V
- Temperature range: -40°C to +85°C
- C Frecuency range: 0GHz 40GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Brass with Gold Plating
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title: Product Family: Product Series: Body Material: Centre Contact Retention Force: Contact Pin Material: Min Coupling Torque: Max Coupling Torque: Dielectric Withstanding Voltage: Durability: Function: Impedance: Insulation Resistance: Insulator: Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency: Pcb Thickness: Thread Size: Voltage Max: Vswr:

2.92mm Series Edge Launch Connector Radio Frequency Connectors 2.92mm Series Brass with Gold Plating >20N Beryllium Copper 0.80Nm 1.10Nm >750V >500 cycles Female Edge Launch RF Connector 50Ohm >5000MOhm **ULTEM 1000** +85°C -40°C 0GHz 40GHz 0.87mm 1/4 36UNS 2A 250V <1.30

// Product PDF Links

2.92mm Series Product Datasheet

// Product 3D CAD Model Links

RF292CPB3D CAD Model