RF292CPB Datasheet




Product Name // 2.92mm Plug Edge Launch PCB RF Connector



* Representative product image only



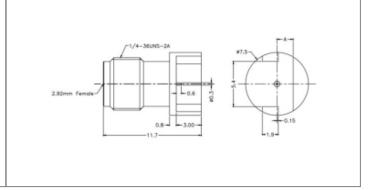

// Product Description:

- 2.92mm Plug Edge Launch PCB RF Connector
- Maximum Voltage: 250V
- O Temperature range: -40°C to +85°C
- Frecuency range: 0GHz 40GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Brass with Gold Plating
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title:

Product Family:

Product Series:

Body Material:

Centre Contact Retention Force:

Contact Pin Material: Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability: Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency:

Pcb Thickness: Thread Size: Voltage Max: Vswr: 2.92mm Series Edge Launch Connector

Radio Frequency Connectors

2.92mm Series

Brass with Gold Plating

>20N

Beryllium Copper

0.80Nm 1.10Nm >750V

>500 cycles

Female Edge Launch RF Connector

50Ohm >5000MOhm ULTEM 1000 +85°C -40°C

0GHz 40GHz 0.87mm 1/4 36UNS 2A

250V <1.30

// Product PDF Links



// Product 3D CAD Model Links

