


RF292DJB Datasheet

**Product Name // 2.92mm Jack Solderless PCB
Compression Mount RF Connector, 2 Hole Flange**

 [View Product Page](#)

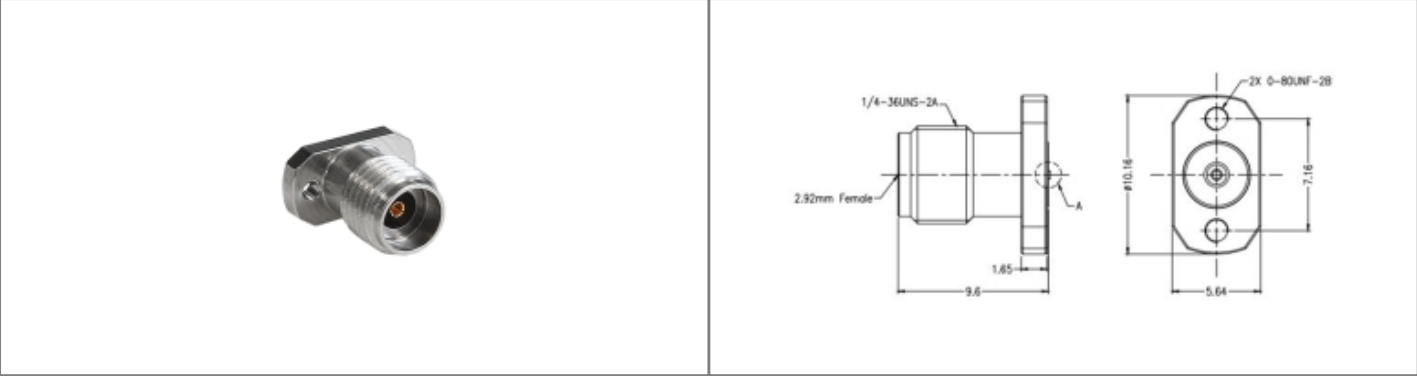

// Product Description:

- 2.92mm Jack Solderless PCB Compression Mount RF Connector, 2 Hole Flange
 - Maximum Voltage: 250V
 - Temperature range: -55°C to +125°C
 - Frequency range: 0GHz - 40GHz
 - VSWR: <1.25
- Dielectric withstanding Voltage: >750V
 - Impedance: 50Ohm
 - Body Material: Stainless Steel Passivation
 - Contact Material: Beryllium Copper

// General Information:

Product Display Title:	2.92mm Series Compression Mount Connector
Product Family:	Radio Frequency Connectors
Product Series:	2.92mm Series
Body Length:	9.60mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>20N
Contact Pin Material:	Beryllium Copper
Min Coupling Torque:	0.80Nm
Max Coupling Torque:	1.10Nm
Dielectric Withstanding Voltage:	>750V
Durability:	>500 cycles
Flange Mount Length:	10.16mm
Function:	Female Flange Mount RF Connector
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	UNFILLED ULTEM 1000/PEI
Max Operating Temperature:	+125°C
Min Operating Temperature:	-55°C
Mount Hole Distance:	7.16mm
Min Operating Frequency:	0GHz
Max Operating Frequency:	40GHz
Thread Size:	1/4 36UNS 2A
Voltage Max:	250V
Vswr:	<1.25

// Product PDF Links



// Product 3D CAD Model Links



Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)