
RF292EP Datasheet



Product Name // 2.92mm Plug End Launch RF Connector

View Product Page



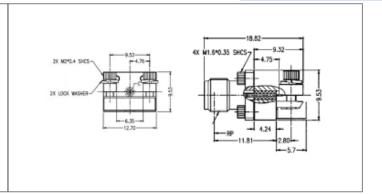

// Product Description:

- 2.92mm Plug End Launch RF Connector
- Maximum Voltage: 250V
- C Temperature range: -55°C to +125°C
- Frecuency range: 0GHz 40GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title: 2.92mm Series End Launch Connector

Product Family: Radio Frequency Connectors

Product Series: 2.92mm Series

Body Length: 22.22mm

Body Material: Stainless Steel Passivation
Centre Contact Retention Force: >26.7N

Contact Pin Material: Beryllium Copper Min Coupling Torque: 0.80Nm

Max Coupling Torque:1.10NmCoupling Nut Retention Force:>27.2KgDielectric Withstanding Voltage:>750V

Durability: >500 cycles
Function: Male End Launch RF Connector

Impedance: 500hm

Insulation Resistance: >5000MOhm

Insulator: (UNFILLED ULTEM 1000/PEI) / (Adapter ASTM D 1710)

Max Operating Temperature:+1Min Operating Temperature:-55Min Operating Frequency:0GMax Operating Frequency:400Voltage Max:250

+125°C

-55°C 0GHz 40GHz 250V <1.50

// Product PDF Links

Vswr:



// Product 3D CAD Model Links

