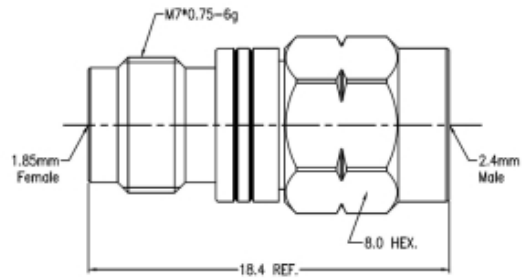


**Product Name // 1.85mm Jack to 2.92mm Jack RF Adapter**
 [View Product Page](#)


\* Representative product image only

// **Product Description:**

- ⊞ 1.85mm Jack to 2.92mm Jack RF Adapter
- ⊞ Maximum Voltage: 250V
- ⊞ Temperature range: -40°C to +85°C
- ⊞ Frequency range: 0GHz - 40GHz
- ⊞ VSWR: <1.20
- ⊞ Dielectric withstanding Voltage: >750V
- ⊞ Impedance: 50Ohm
- ⊞ Body Material: Stainless Steel Passivation
- ⊞ Contact Material: Beryllium Copper

// **General Information:**

Product Display Title:	RF Adapter Series 1.85mm Straight
Product Family:	Radio Frequency Connectors
Product Series:	RF Adapter Series
Body Length:	20.60mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>20N
Contact Pin Material:	Beryllium Copper
Min Coupling Torque:	0.80Nm
Max Coupling Torque:	1.10Nm
Dielectric Withstanding Voltage:	>750V
Durability:	>500 cycles
Function:	Female to Female RF Adapter
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	ULTEM 1000/PEI
Max Operating Temperature:	+85°C
Min Operating Temperature:	-40°C
Min Operating Frequency:	0GHz
Max Operating Frequency:	40GHz
Thread Size:	M7x0.75 6g & 1/4 36UNS 2A
Voltage Max:	250V
Vswr:	<1.20

// **Product PDF Links**
 [RF Adapter Series Product...](#)
// **Product 3D CAD Model Links**
 [RFAA185J292J3D CAD Model](#)

 Have a question or project enquiry  
 you'd like to talk to us about?

[Click Here To Contact Us](#)