# RFAA185J292P Datasheet




## Product Name // 1.85mm Jack to 2.92mm Plug RF Adapter

View Product Page

\* Representative product image only



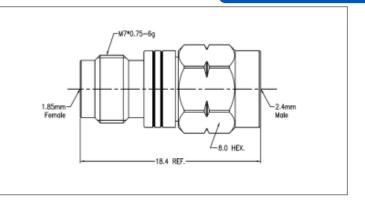

#### // Product Description:

- 0 1.85mm Jack to 2.92mm Plug RF Adapter
- Maximum Voltage: 250V
- 0 Temperature range: -40°C to +85°C
- Frecuency range: 0GHz 40GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

#### **General Information:**

**Product Display Title:** 

Product Family:

**Product Series:** Body Length:

**Body Material:** 

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque:

Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Function:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature:

Min Operating Temperature:

Min Operating Frequency: Max Operating Frequency:

Thread Size:

Voltage Max:

Vswr:

RF Adapter Series 1.85mm Straight

Radio Frequency Connectors

RF Adapter Series

21.80mm

Stainless Steel Passivation

>20N

Beryllium Copper 0.80Nm

1.10Nm

>750V

>500 cycles

Male to Female RF Adapter

500hm

>5000MOhm

ULTEM 1000/PEI

+85°C

-40°C 0GHz

40GHz

M7x0.75 6g

250V <1.20

## // Product PDF Links



RF Adapter Series Product...

### // Product 3D CAD Model Links



RFAA185J292P3D CAD Model