RFAA185J350P Datasheet




Product Name // 1.85mm Jack to 3.5mm Plug RF Adapter

View Product Page

* Representative product image only



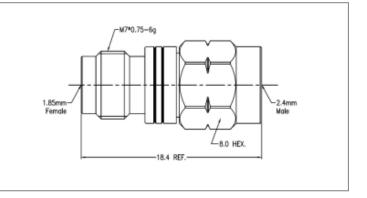

// Product Description:

- 0 1.85mm Jack to 3.5mm Plug RF Adapter
- Maximum Voltage: 250V
- 0 Temperature range: -40°C to +85°C
- Frecuency range: 0GHz 33GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

General Information:

Product Display Title:

Product Family:

Product Series: Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material: Min Coupling Torque:

Max Coupling Torque: Dielectric Withstanding Voltage:

Durability: Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency:

Thread Size: Voltage Max: Vswr:

RF Adapter Series 1.85mm Straight

Radio Frequency Connectors

RF Adapter Series 22.00mm

Stainless Steel Passivation

>20N

Beryllium Copper

0.80Nm 1.10Nm >750V

>500 cycles

Male to Female RF Adapter

500hm >5000MOhm ULTEM 1000/PEI

+85°C -40°C 0GHz 33GHz M7x0.75 6g 250V <1.20

// Product PDF Links



RF Adapter Series Product...

// Product 3D CAD Model Links



RFAA185J350P3D CAD Model