# RFAA185P185J Datasheet




# Product Name // 1.85mm Plug to Jack RF Adapter

**View Product Page** 

\* Representative product image only



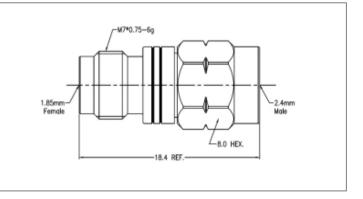

# // Product Description:

- O 1.85mm Plug to Jack RF Adapter
- 0 Maximum Voltage: 150V
- 0 Temperature range: -40°C to +85°C
- 0 Frecuency range: 0GHz - 65GHz
- 0 VSWR:

- O Dielectric withstanding Voltage: >500V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

#### **General Information:**

**Product Display Title:** 

**Product Family:** 

**Product Series:** Body Length:

**Body Material:** 

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

**Durability:** 

Function:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature:

Min Operating Frequency: Max Operating Frequency:

Voltage Max:

Vswr:

RF Adapter Series 1.85mm Straight

Radio Frequency Connectors

RF Adapter Series

21.80mm

Stainless Steel Passivation

>20N

Beryllium Copper

0.80Nm

1.10Nm >500V

>500 cycles

Male to Female RF Adapter

50Ohm

>5000MOhm

ULTEM 1000/PEI

+85°C

-40°C 0GHz

65GHz

150V

<1.25

## // Product PDF Links



RF Adapter Series Product...

## // Product 3D CAD Model Links



RFAA185P185J3D CAD Model

1