RFAA185P185P Datasheet




Product Name // 1.85mm Plug to Plug RF Adapter

View Product Page

* Representative product image only



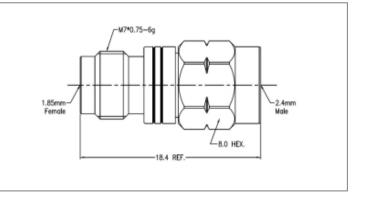

// Product Description:

- O 1.85mm Plug to Plug RF Adapter
- 0 Maximum Voltage: 150V
- 0 Temperature range: -40°C to +85°C
- 0 Frecuency range: 0GHz - 65GHz
- 0 VSWR:

- O Dielectric withstanding Voltage: >500V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

General Information:

Product Display Title:

Product Family:

Product Series: Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material: Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Function:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency:

Voltage Max:

Vswr:

RF Adapter Series 1.85mm Straight

Radio Frequency Connectors

RF Adapter Series

20.70mm

Stainless Steel Passivation

>20N

Beryllium Copper

0.80Nm

1.10Nm

>500V >500 cycles

Male to Male RF Adapter

50Ohm

>5000MOhm

ULTEM 1000/PEI

+85°C

-40°C 0GHz

65GHz

150V

<1.25





RF Adapter Series Product...

// Product 3D CAD Model Links



RFAA185P185P3D CAD Model