
## RFAA185P240J Datasheet



## Product Name // 1.85mm Plug to 2.4mm Jack RF Adapter

View Product Page



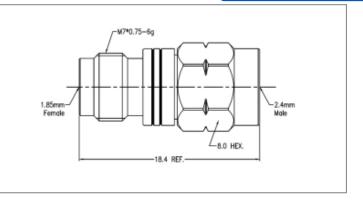

## // Product Description:

- 0 1.85mm Plug to 2.4mm Jack RF Adapter
- Maximum Voltage: 150V
- 0 Temperature range: -40°C to +85°C
- Frecuency range: 0GHz 50GHz
- Ó VSWR: <1.25

- O Dielectric withstanding Voltage: >500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

## **General Information:**

**Product Display Title:** 

Product Family:

**Product Series:** Body Length:

**Body Material:** 

Centre Contact Retention Force:

Contact Pin Material: Min Coupling Torque:

Max Coupling Torque: Dielectric Withstanding Voltage:

Durability: Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency:

Thread Size: Voltage Max: Vswr:

RF Adapter Series 1.85mm Straight

Radio Frequency Connectors

RF Adapter Series 18.50mm

Stainless Steel Passivation

>20N

Beryllium Copper 0.80Nm

1.10Nm >500V

>500 cycles

Male to Female RF Adapter

500hm >5000MOhm ULTEM 1000/PEI

+85°C -40°C 0GHz 50GHz M7x0.75 6g 150V <1.25

// Product PDF Links

RF Adapter Series Product...

// Product 3D CAD Model Links



RFAA185P240J3D CAD Model