


RFAA240J240J Datasheet

Product Name // 2.4mm Jack to Jack RF Adapter

[View Product Page](#)

* Representative product image only

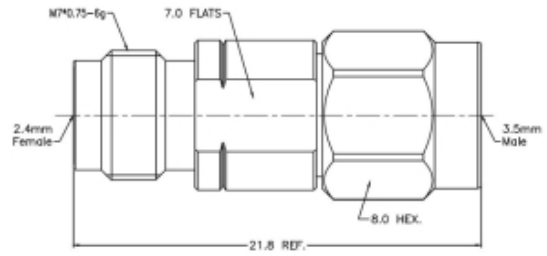

// Product Description:

- ⊕ 2.4mm Jack to Jack RF Adapter
- ⊕ Maximum Voltage: 150V
- ⊕ Temperature range: -40°C to +85°C
- ⊕ Frequency range: 0GHz - 50GHz
- ⊕ VSWR: <1.20
- ⊕ Dielectric withstanding Voltage: >500V
- ⊕ Impedance: 50Ohm
- ⊕ Body Material: Stainless Steel Passivation
- ⊕ Contact Material: Beryllium Copper

// General Information:

| | |
|----------------------------------|-----------------------------------|
| Product Display Title: | RF Adapter Series 2.40mm Straight |
| Product Family: | Radio Frequency Connectors |
| Product Series: | RF Adapter Series |
| Body Length: | 20.00mm |
| Body Material: | Stainless Steel Passivation |
| Centre Contact Retention Force: | >20N |
| Contact Pin Material: | Beryllium Copper |
| Min Coupling Torque: | 0.80Nm |
| Max Coupling Torque: | 1.10Nm |
| Dielectric Withstanding Voltage: | >500V |
| Durability: | >500 cycles |
| Function: | Female to Female RF Adapter |
| Impedance: | 50Ohm |
| Insulation Resistance: | >5000MOhm |
| Insulator: | ULTEM 1000/PEI |
| Max Operating Temperature: | +85°C |
| Min Operating Temperature: | -40°C |
| Min Operating Frequency: | 0GHz |
| Max Operating Frequency: | 50GHz |
| Voltage Max: | 150V |
| Vswr: | <1.20 |

// Product PDF Links

[RF Adapter Series Product...](#)

// Product 3D CAD Model Links

[RFAA240J240J3D CAD Model](#)


Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)