








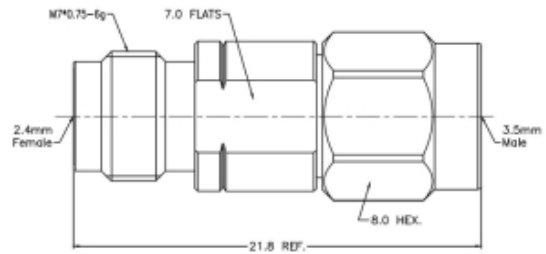


Product Name // 2.4mm Jack to 3.5mm Jack RF Adapter
 [View Product Page](#)

* Representative product image only


// Product Description:

-  2.4mm Jack to 3.5mm Jack RF Adapter
-  Maximum Voltage: 250V
-  Temperature range: -40°C to +85°C
-  Frequency range: 0GHz - 33GHz
-  VSWR: <1.15
-  Dielectric withstanding Voltage: >750V
-  Impedance: 50Ohm
-  Body Material: Stainless Steel Passivation
-  Contact Material: Beryllium Copper

// General Information:

Product Display Title:	RF Adapter Series 2.40mm Straight
Product Family:	Radio Frequency Connectors
Product Series:	RF Adapter Series
Body Length:	20.60mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>20N
Contact Pin Material:	Beryllium Copper
Dielectric Withstanding Voltage:	>750V
Durability:	>500 cycles
Function:	Female to Female RF Adapter
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	ULTEM 1000/PEI
Max Operating Temperature:	+85°C
Min Operating Temperature:	-40°C
Min Operating Frequency:	0GHz
Max Operating Frequency:	33GHz
Thread Size:	M7x0.75 6g & 1/4 36UNS 2A
Voltage Max:	250V
Vswr:	<1.15

// Product PDF Links
 [RF Adapter Series Product...](#)
// Product 3D CAD Model Links
 [RFAA240J350J3D CAD Model](#)

 Have a question or project enquiry
 you'd like to talk to us about?

[Click Here To Contact Us](#)