RFAA240J350J Datasheet




Product Name // 2.4mm Jack to 3.5mm Jack RF Adapter

View Product Page

* Representative product image only



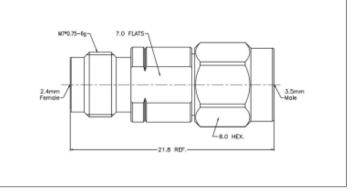

Product Description:

- 0 2.4mm Jack to 3.5mm Jack RF Adapter
- 0 Maximum Voltage: 250V
- 0 Temperature range: -40°C to +85°C
- 0 Frecuency range: 0GHz - 33GHz
- 0 VSWR:

- 0 Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- Contact Material: Beryllium Copper

General Information:

Product Display Title:

Product Family:

Product Series: Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability:

Function:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Min Operating Frequency:

Max Operating Frequency:

Thread Size: Voltage Max:

Vswr:

RF Adapter Series 2.40mm Straight

Radio Frequency Connectors

RF Adapter Series

20.60mm

Stainless Steel Passivation

>20N

Beryllium Copper

>750V

>500 cycles

Female to Female RF Adapter

50Ohm >5000MOhm

ULTEM 1000/PEI

+85°C -40°C

0GHz

33GHz

M7x0.75 6g & 1/4 36UNS 2A

250V

<1.15

// Product PDF Links



// Product 3D CAD Model Links



RFAA240J350J3D CAD Model