
# **RFAA240J350P** Datasheet



## Product Name // 2.4mm Jack to 3.5mm Plug RF Adapter

#### 🚯 View Product Page

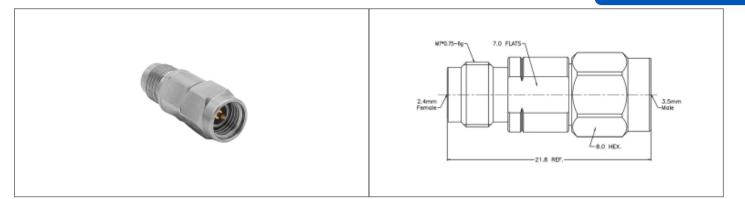

### // Product Description:

- O 2.4mm Jack to 3.5mm Plug RF Adapter
- O Maximum Voltage: 250V
- O Temperature range: -40°C to +85°C
- O Frecuency range: 0GHz 33GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

### // General Information:

Product Display Title: Product Family: Product Series: Body Length: Body Material: **Centre Contact Retention Force:** Contact Pin Material: **Dielectric Withstanding Voltage:** Durability: Function: Impedance: Insulation Resistance: Insulator: Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency: Thread Size: Voltage Max: Vswr:

RF Adapter Series 2.40mm Straight Radio Frequency Connectors **RF** Adapter Series 21.80mm Stainless Steel Passivation >20N Beryllium Copper >750V >500 cycles Male to Female RF Adapter 50Ohm >5000MOhm ULTEM 1000/PEI +85°C -40°C 0GHz 33GHz M7x0.75 6g 250V <1.15

#### // Product PDF Links

RF Adapter Series Product...

// Product 3D CAD Model Links

RFAA240J350P3D CAD Model