
RFAA240P240P Datasheet



Product Name // 2.4mm Plug to Plug RF Adapter

View Product Page

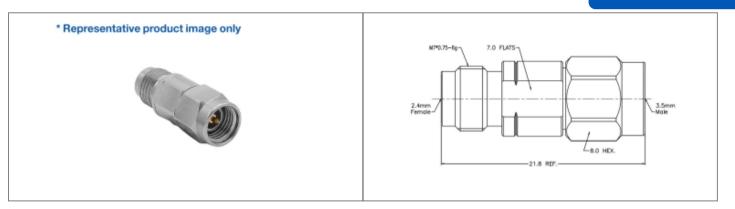

// Product Description:

- O 2.4mm Plug to Plug RF Adapter
- O Maximum Voltage: 150V
- O Temperature range: -40°C to +85°C
- O Frecuency range: 0GHz 50GHz
- O VSWR:

- O Dielectric withstanding Voltage: >500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title: **Product Family: Product Series:** Body Length: Body Material: Centre Contact Retention Force: Contact Pin Material: Min Coupling Torque: Max Coupling Torque: Dielectric Withstanding Voltage: Durability: Function: Impedance: Insulation Resistance: Insulator: Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency: Voltage Max: Vswr:

RF Adapter Series 2.40mm Straight **Radio Frequency Connectors RF** Adapter Series 17.40mm Stainless Steel Passivation >20N Beryllium Copper 0.80Nm 1.10Nm >500V >500 cvcles Male to Male RF Adapter 50Ohm >5000MOhm ULTEM 1000/PEI +85°C -40°C 0GHz 50GHz 150V <1.20

// Product PDF Links

RF Adapter Series Product...

// Product 3D CAD Model Links

RFAA240P240P3D CAD Model