RFAA240P292J Datasheet




Product Name // 2.4mm Plug to 2.92mm Jack RF Adapter

View Product Page

* Representative product image only



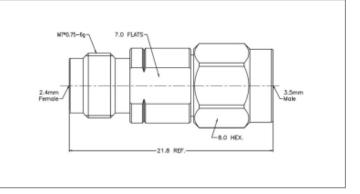

// Product Description:

- 2.4mm Plug to 2.92mm Jack RF Adapter
- 0 Maximum Voltage: 250V
- 0 Temperature range: -40°C to +85°C
- 0 Frecuency range: 0GHz - 40GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

General Information:

Product Display Title:

Product Family:

Product Series:

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material: Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability: Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency:

Thread Size: Voltage Max: Vswr:

RF Adapter Series 2.40mm Straight

Radio Frequency Connectors

RF Adapter Series 19.30mm

Stainless Steel Passivation

>20N

Beryllium Copper

0.80Nm 1.10Nm >750V >500 cycles

Male to Female RF Adapter

500hm >5000MOhm ULTEM 1000/PEI

+85°C -40°C 0GHz 40GHz 1/4 36UNS 2A 250V <1.20

// Product PDF Links



// Product 3D CAD Model Links



RFAA240P292J3D CAD Model