RFAA292J292J Datasheet




Product Name // 2.92mm Jack to Jack RF Adapter

View Product Page

* Representative product image only



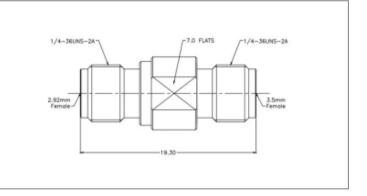

// Product Description:

- 0 2.92mm Jack to Jack RF Adapter
- 0 Maximum Voltage: 250V
- 0 Temperature range: -40°C to +85°C
- O Frecuency range: 0GHz - 40GHz
- 0 VSWR:

- Dielectric withstanding Voltage: >750V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

General Information:

Product Display Title:

Product Family: **Product Series:**

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability: Function:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature:

Min Operating Frequency: Max Operating Frequency:

Voltage Max:

Vswr:

RF Adapter Series 2.92mm Straight

Radio Frequency Connectors

RF Adapter Series

19.30mm

Stainless Steel Passivation

>20N

Beryllium Copper

>750V

>500 cycles

Female to Female RF Adapter

50Ohm

>5000MOhm

ULTEM 1000/PEI +85°C

-40°C

0GHz

40GHz

250V

<1.20

// Product PDF Links



RF Adapter Series Product...

// Product 3D CAD Model Links



RFAA292J292J3D CAD Model