
RFAA292J350P Datasheet



Product Name // 2.92mm Jack to 3.5mm Plug RF Adapter

View Product Page



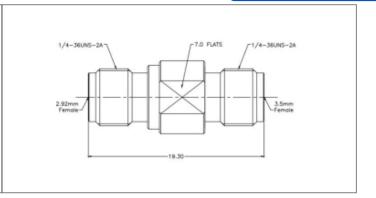

// Product Description:

- 2.92mm Jack to 3.5mm Plug RF Adapter
- Maximum Voltage: 250V
- O Temperature range: -40°C to +85°C
- Frecuency range: 0GHz 33GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title:

Product Family:

Product Series:

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability: Function:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Min Operating Frequency:

Max Operating Frequency: Thread Size:

Voltage Max:

Vswr:

RF Adapter Series 2.92mm Straight

Radio Frequency Connectors

RF Adapter Series

20.50mm

Stainless Steel Passivation

>20N

Beryllium Copper

>750V

>500 cycles

Male to Female RF Adapter

50Ohm >5000MOhm ULTEM 1000/PEI

+85°C -40°C

0GHz

33GHz

1/4 36UNS 2A

250V

<1.15

// Product PDF Links



DE Adentes Cosice Duadret

// Product 3D CAD Model Links



RFAA292J350P3D CAD Model