# RFAA292P292P Datasheet




## Product Name // 2.92mm Plug to Plug RF Adapter

View Product Page

\* Representative product image only



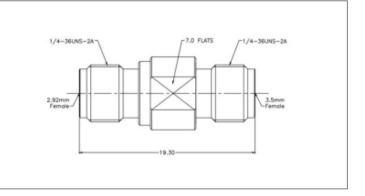

#### // Product Description:

- 0 2.92mm Plug to Plug RF Adapter
- 0 Maximum Voltage: 250V
- 0 Temperature range: -40°C to +85°C
- O Frecuency range: 0GHz - 40GHz
- 0 VSWR:

- Dielectric withstanding Voltage: >750V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

### **General Information:**

**Product Display Title:** 

Product Family:

**Product Series:** 

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability: Function:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Min Operating Frequency:

Max Operating Frequency:

Voltage Max: Vswr:

RF Adapter Series 2.92mm Straight

Radio Frequency Connectors

**RF Adapter Series** 

21.60mm

Stainless Steel Passivation

>20N

Beryllium Copper

>750V

>500 cycles

Male to Male RF Adapter

50Ohm

>5000MOhm

ULTEM 1000/PEI +85°C

-40°C

0GHz

40GHz 250V

<1.20

#### // Product PDF Links



// Product 3D CAD Model Links



RFAA292P292P3D CAD Model