RFAA350J350P Datasheet




Product Name // 3.5mm Jack to Plug RF Adapter

View Product Page

* Representative product image only



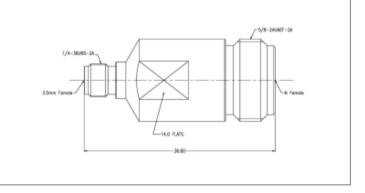

// Product Description:

- 0 3.5mm Jack to Plug RF Adapter
- 0 Maximum Voltage: 335V
- 0 Temperature range: -40°C to +85°C
- O Frecuency range: 0GHz - 33GHz
- VSWR:

- Dielectric withstanding Voltage: >750V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- 0 Contact Material: Beryllium Copper

General Information:

Product Display Title:

Product Family:

Product Series:

Body Length: Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability: Function:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Min Operating Frequency:

Max Operating Frequency:

Voltage Max:

Vswr:

RF Adapter Series 3.50mm Straight

Radio Frequency Connectors

RF Adapter Series

20.50mm

Stainless Steel Passivation

>20N

Beryllium Copper

>750V

>500 cycles

Male to Female RF Adapter 50Ohm

>5000MOhm ULTEM 1000/PEI

+85°C

-40°C

0GHz

33GHz 335V

<1.20

// Product PDF Links



RF Adapter Series Product...

// Product 3D CAD Model Links



RFAA350J350P3D CAD Model