


RFAA350JNP Datasheet

Product Name // 3.5mm Jack to N Plug RF Adapter

[View Product Page](#)

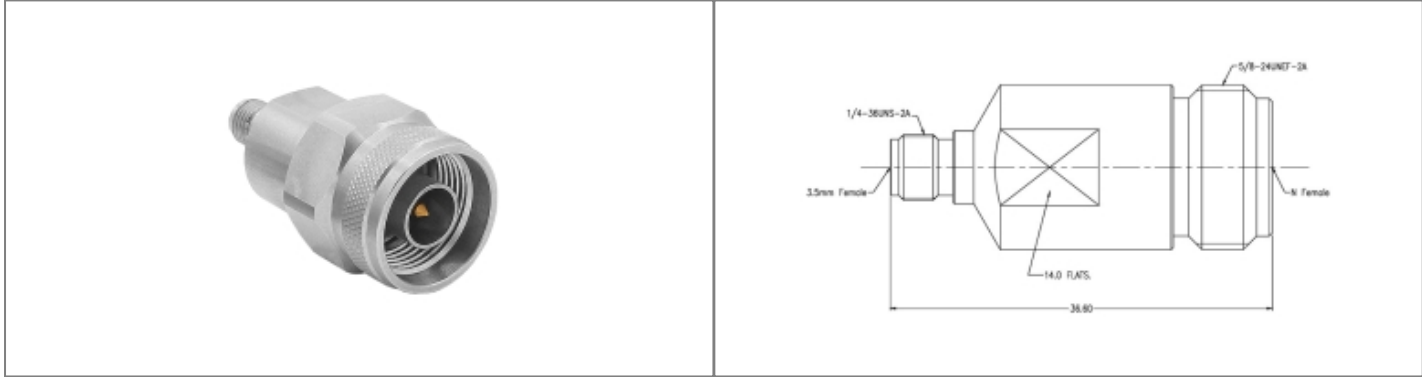

// Product Description:

- ⬢ 3.5mm Jack to N Plug RF Adapter
- ⬢ Maximum Voltage: 335V
- ⬢ Temperature range: -65°C to +165°C
- ⬢ Frequency range: 0GHz - 18GHz
- ⬢ VSWR: <1.15
- ⬢ Dielectric withstanding Voltage: >750V
- ⬢ Impedance: 50Ohm
- ⬢ Body Material: Stainless Steel Passivation
- ⬢ Contact Material: Beryllium Copper

// General Information:

Product Display Title:	RF Adapter Series 3.50mm Straight
Product Family:	Radio Frequency Connectors
Product Series:	RF Adapter Series
Body Length:	38.30mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Dielectric Withstanding Voltage:	>750V
Durability:	>500 cycles
Function:	Male to Female RF Adapter
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	UNFILLED ULTEM 1000/PEI
Max Operating Temperature:	+165°C
Min Operating Temperature:	-65°C
Min Operating Frequency:	0GHz
Max Operating Frequency:	18GHz
Thread Size:	1/4 36UNS 2A
Voltage Max:	335V
Vswr:	<1.15

// Product PDF Links

[RF Adapter Series Product...](#)

// Product 3D CAD Model Links

[RFAA350JNP3D CAD Model](#)