
RFAA350PNJ Datasheet



Product Name // 3.5mm Plug to N Jack RF Adapter

View Product Page



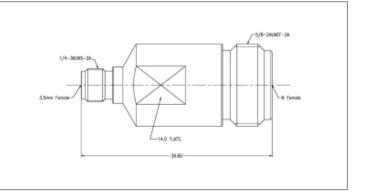

Product Description:

- 0 3.5mm Plug to N Jack RF Adapter
- 0 Maximum Voltage: 335V
- 0 Temperature range: -65°C to +165°C
- 0 Frecuency range: 0GHz - 18GHz
- 0 VSWR: <1.15

- 0 Dielectric withstanding Voltage: >750V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- Contact Material: Beryllium Copper

General Information:

Product Display Title:

Product Family:

Product Series: Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability: Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency:

Thread Size: Voltage Max: Vswr:

RF Adapter Series 3.50mm Straight

Radio Frequency Connectors

RF Adapter Series

37.80mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

>750V >500 cycles

Male to Female RF Adapter

50Ohm >5000MOhm

UNFILLED ULTEM 1000/PEI

+165°C -65°C 0GHz 18GHz

5/8 24UNEF 2A

335V <1.15

// Product PDF Links



// Product 3D CAD Model Links



RFAA350PNJ3D CAD Model