
RFAA350PNJ Datasheet



Product Name // 3.5mm Plug to N Jack RF Adapter

View Product Page



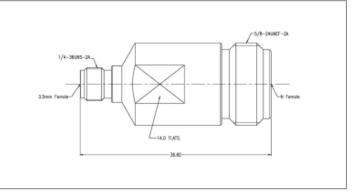

// Product Description:

- 3.5mm Plug to N Jack RF Adapter
- Maximum Voltage: 335V
- O Temperature range: -65°C to +165°C
- Frecuency range: 0GHz 18GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title:

Product Family:

Product Series:

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability: Function:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency:

Thread Size: Voltage Max: Vswr: RF Adapter Series 3.50mm Straight

Radio Frequency Connectors

RF Adapter Series

37.80mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

>750V

>500 cycles

Male to Female RF Adapter

50Ohm

>5000MOhm

UNFILLED ULTEM 1000/PEI

+165°C -65°C 0GHz

18GHz

5/8 24UNEF 2A

335V <1.15

// Product PDF Links



DE Adentes Cosice Duadret

// Product 3D CAD Model Links



RFAA350PNJ3D CAD Model