RFAA350PNP Datasheet




Product Name // 3.5mm Plug to N Plug RF Adapter

View Product Page





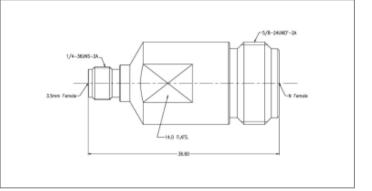

// Product Description:

- 0 3.5mm Plug to N Plug RF Adapter
- 0 Maximum Voltage: 335V
- 0 Temperature range: -65°C to +165°C
- O Frecuency range: 0GHz - 18GHz
- VSWR:

- Dielectric withstanding Voltage: >750V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- 0 Contact Material: Beryllium Copper

General Information:

Product Display Title:

Product Family:

Product Series:

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Min Operating Frequency:

Max Operating Frequency: Voltage Max:

Vswr:

RF Adapter Series 3.50mm Straight

Radio Frequency Connectors

RF Adapter Series

40.00mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

>750V

>500 cycles

Male to Male RF Adapter

50Ohm

>5000MOhm

UNFILLED ULTEM 1000/PEI

+165°C -65°C

0GHz

18GHz

335V

<1.15

// Product PDF Links



RF Adapter Series Product...

// Product 3D CAD Model Links



RFAA350PNP3D CAD Model