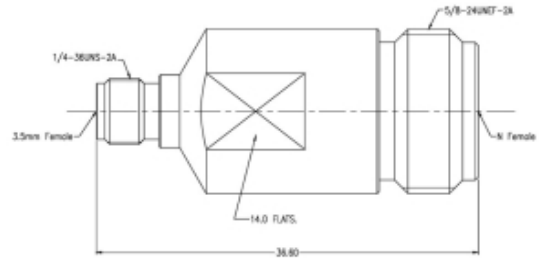


**Product Name // 3.5mm Plug to N Plug RF Adapter**
 [View Product Page](#)

\* Representative product image only


**// Product Description:**

- ⊕ 3.5mm Plug to N Plug RF Adapter
- ⊕ Maximum Voltage: 335V
- ⊕ Temperature range: -65°C to +165°C
- ⊕ Frequency range: 0GHz - 18GHz
- ⊕ VSWR: <1.15
- ⊕ Dielectric withstanding Voltage: >750V
- ⊕ Impedance: 50Ohm
- ⊕ Body Material: Stainless Steel Passivation
- ⊕ Contact Material: Beryllium Copper

**// General Information:**

Product Display Title:	RF Adapter Series 3.50mm Straight
Product Family:	Radio Frequency Connectors
Product Series:	RF Adapter Series
Body Length:	40.00mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Dielectric Withstanding Voltage:	>750V
Durability:	>500 cycles
Function:	Male to Male RF Adapter
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	UNFILLED ULTEM 1000/PEI
Max Operating Temperature:	+165°C
Min Operating Temperature:	-65°C
Min Operating Frequency:	0GHz
Max Operating Frequency:	18GHz
Voltage Max:	335V
Vswr:	<1.15

**// Product PDF Links**
 [RF Adapter Series Product...](#)
**// Product 3D CAD Model Links**
 [RFAA350PNP3D CAD Model](#)