


RFAA4240J240J Datasheet

Product Name // 2.4 Jack to 2.4 Jack RF Adapter, 4 Hole Flange

[View Product Page](#)

* Representative product image only

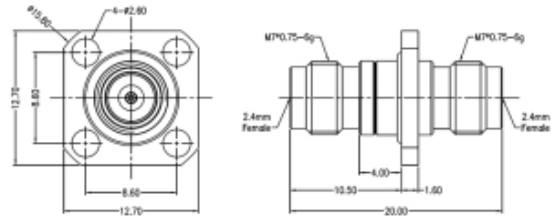

// Product Description:

- | | |
|---|---|
| <ul style="list-style-type: none"> ⊕ 2.4 Jack to 2.4 Jack RF Adapter, 4 Hole Flange ⊕ Maximum Voltage: 150V ⊕ Temperature range: -40°C to +85°C ⊕ Frequency range: 0GHz - 50GHz ⊕ VSWR: <1.20 | <ul style="list-style-type: none"> ⊕ Dielectric withstanding Voltage: >500V ⊕ Impedance: 50Ohm ⊕ Body Material: Stainless Steel Passivation ⊕ Contact Material: Beryllium Copper |
|---|---|

// General Information:

Product Display Title:	RF Adapter Series Flange Mount
Product Family:	Radio Frequency Connectors
Product Series:	RF Adapter Series
Body Length:	20.00mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>20N
Contact Pin Material:	Beryllium Copper
Dielectric Withstanding Voltage:	>500V
Durability:	>500 cycles
Flange Mount Length:	12.70mm
Function:	Female to Female RF Flange Mount Adapter
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	ULTEM 1000/PEI
Max Operating Temperature:	+85°C
Min Operating Temperature:	-40°C
Mount Hole Distance:	8.60mm
Min Operating Frequency:	0GHz
Max Operating Frequency:	50GHz
Voltage Max:	150V
Vswr:	<1.20

// Product PDF Links

[RF Adapter Series Product...](#)

// Product 3D CAD Model Links

[RFAA4240J240J3D CAD Model](#)



Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)