RFAA4240J240J Datasheet




Product Name // 2.4 Jack to 2.4 Jack RF Adapter, 4 Hole **Flange**



* Representative product image only



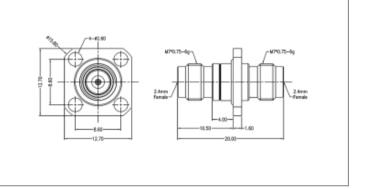

// Product Description:

- 0 2.4 Jack to 2.4 Jack RF Adapter, 4 Hole Flange
- 0 Maximum Voltage: 150V
- 0 Temperature range: -40°C to +85°C
- 0 Frecuency range: 0GHz - 50GHz
- O VSWR:

- O Dielectric withstanding Voltage: >500V
- \bigcirc Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- Contact Material: Beryllium Copper

// General Information:

Product Display Title:

Product Family:

Product Series:

Body Length: Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency:

Voltage Max: Vswr:

RF Adapter Series Flange Mount Radio Frequency Connectors

RF Adapter Series

20.00mm

Stainless Steel Passivation

>20N

Beryllium Copper

>500V

>500 cycles

12.70mm

Female to Female RF Flange Mount Adapter

50Ohm >5000MOhm

ULTEM 1000/PEI

+85°C

-40°C 8.60mm 0GHz 50GHz

150V <1.20

// Product PDF Links



RF Adapter Series Product...

// Product 3D CAD Model Links



RFAA4240J240J3D CAD Model