
RFAA4292J292J Datasheet



Product Name // 2.92mm Jack to 2.92mm Jack RF Adapter, 4 Hole Flange

🚯 View Product Page

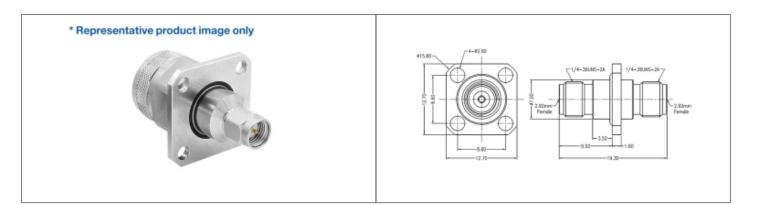

// Product Description:

- O 2.92mm Jack to 2.92mm Jack RF Adapter, 4 Hole Flange
- O Maximum Voltage: 250V
- O Temperature range: -40°C to +85°C
- O Frecuency range: 0GHz 40GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title: Product Family: Product Series: Body Length: **Body Material:** Centre Contact Retention Force: Contact Pin Material: Dielectric Withstanding Voltage: Durability: Flange Mount Length: Function: Impedance: Insulation Resistance: Insulator: Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency: Thread Size: Voltage Max: Vswr:

RF Adapter Series Flange Mount Radio Frequency Connectors **RF** Adapter Series 19.30mm Stainless Steel Passivation >20N Beryllium Copper >750V >500 cvcles 12.70mm Female to Female RF Flange Mount Adapter 50Ohm >5000MOhm ULTEM 1000/PEI +85°C -40°C 8.60mm 0GHz 40GHz 1/4 36UNS 2A 250V <1.20

// Product PDF Links

RF Adapter Series Product...

// Product 3D CAD Model Links

RFAA4292J292J3D CAD Model

Have a question or project enquiry you'd like to talk to us about?