RFAA4NJNJ Datasheet




Product Name // N Jack to N Jack RF Adapter, 4 Hole **Flange**



* Representative product image only



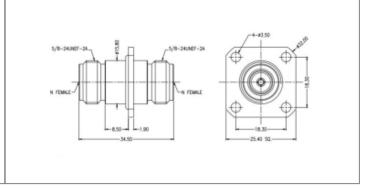

// Product Description:

- 0 N Jack to N Jack RF Adapter, 4 Hole Flange
- Maximum Voltage: 500V
- 0 Temperature range: -40°C to +85°C
- 0 Frecuency range: 0GHz - 18GHz
- VSWR:

- O Dielectric withstanding Voltage: >1500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title: Product Family: **Product Series:**

Body Length: **Body Material:**

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency:

Thread Size: Voltage Max: Vswr:

RF Adapter Series Flange Mount Radio Frequency Connectors

RF Adapter Series 34.50mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

>1500V >500 cycles 25.40mm

Female to Female RF Flange Mount Adapter

50Ohm >5000MOhm

UNFILLED ULTEM 1000/PEI

+85°C -40°C 18.30mm 0GHz 18GHz

5/8 24UNEF 2A

500V <1.15

// Product PDF Links



RF Adapter Series Product.

// Product 3D CAD Model Links



RFAA4NJNJ3D CAD Model

1