


RFAA4NJJN Datasheet

Product Name // N Jack to N Jack RF Adapter, 4 Hole Flange

[View Product Page](#)

* Representative product image only

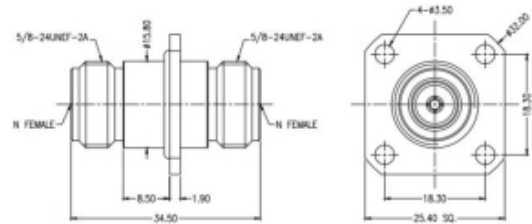

// Product Description:

- ⊕ N Jack to N Jack RF Adapter, 4 Hole Flange
- ⊕ Maximum Voltage: 500V
- ⊕ Temperature range: -40°C to +85°C
- ⊕ Frequency range: 0GHz - 18GHz
- ⊕ VSWR: <1.15
- ⊕ Dielectric withstanding Voltage: >1500V
- ⊕ Impedance: 50Ohm
- ⊕ Body Material: Stainless Steel Passivation
- ⊕ Contact Material: Beryllium Copper

// General Information:

Product Display Title:	RF Adapter Series Flange Mount
Product Family:	Radio Frequency Connectors
Product Series:	RF Adapter Series
Body Length:	34.50mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Dielectric Withstanding Voltage:	>1500V
Durability:	>500 cycles
Flange Mount Length:	25.40mm
Function:	Female to Female RF Flange Mount Adapter
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	UNFILLED ULTEM 1000/PEI
Max Operating Temperature:	+85°C
Min Operating Temperature:	-40°C
Mount Hole Distance:	18.30mm
Min Operating Frequency:	0GHz
Max Operating Frequency:	18GHz
Thread Size:	5/8 24UNEF 2A
Voltage Max:	500V
Vswr:	<1.15

// Product PDF Links

[RF Adapter Series Product...](#)

// Product 3D CAD Model Links

[RFAA4NJJN3D CAD Model](#)


Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)