


RFAA4SMAPNJA Datasheet

Product Name // SMA Plug to N Jack RF Adapter, 4 Hole Flange

[View Product Page](#)

* Representative product image only

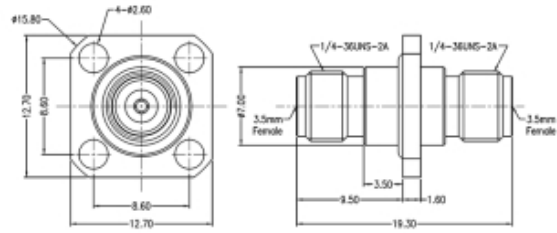

// Product Description:

- ⊗ SMA Plug to N Jack RF Adapter, 4 Hole Flange
- ⊗ Maximum Voltage: 335V
- ⊗ Temperature range: -40°C to +85°C
- ⊗ Frequency range: 0GHz - 18GHz
- ⊗ VSWR: <1.15
- ⊗ Dielectric withstanding Voltage: >750V
- ⊗ Impedance: 50Ohm
- ⊗ Body Material: Stainless Steel Passivation
- ⊗ Contact Material: Beryllium Copper

// General Information:

| | |
|----------------------------------|--|
| Product Display Title: | RF Adapter Series Flange Mount |
| Product Family: | Radio Frequency Connectors |
| Product Series: | RF Adapter Series |
| Body Length: | 36.80mm |
| Body Material: | Stainless Steel Passivation |
| Centre Contact Retention Force: | >26.7N |
| Contact Pin Material: | Beryllium Copper |
| Dielectric Withstanding Voltage: | >750V |
| Durability: | >500 cycles |
| Flange Mount Length: | 25.40mm |
| Function: | Male to Female RF Flange Mount Adapter |
| Impedance: | 50Ohm |
| Insulation Resistance: | >5000MOhm |
| Insulator: | Adapter ASTM D 1710 |
| Max Operating Temperature: | +85°C |
| Min Operating Temperature: | -40°C |
| Mount Hole Distance: | 18.30mm |
| Min Operating Frequency: | 0GHz |
| Max Operating Frequency: | 18GHz |
| Seal Position: | SMA Side |
| Thread Size: | 5/8 24UNEF 2A |
| Voltage Max: | 335V |
| Vswr: | <1.15 |

// Product PDF Links

[RF Adapter Series Product...](#)

// Product 3D CAD Model Links

[RFAA4SMAPNJA3D CAD Model](#)