RFAA4SMAPNJB Datasheet




Product Name // SMA Plug to N Jack RF Adapter, 4 Hole **Flange**



* Representative product image only



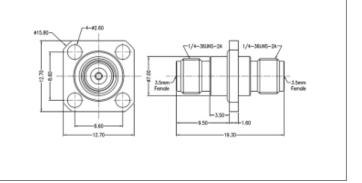

// Product Description:

- 0 SMA Plug to N Jack RF Adapter, 4 Hole Flange
- 0 Maximum Voltage: 335V
- 0 Temperature range: -40°C to +85°C
- C Frecuency range: 0GHz 18GHz
- O VSWR:

- 0 Dielectric withstanding Voltage: >750V
- 0 Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title:

Product Family:

Product Series:

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature:

Mount Hole Distance: Min Operating Frequency:

Max Operating Frequency: Seal Position:

Thread Size: Voltage Max:

Vswr:

RF Adapter Series Flange Mount

Radio Frequency Connectors

RF Adapter Series

36.80mm

Stainless Steel Passivation

>26.7N

Bervllium Copper

>750V

>500 cycles

25.40mm

Male to Female RF Flange Mount Adapter

50Ohm

>5000MOhm

Adapter ASTM D 1710

+85°C

-40°C

18.30mm 0GHz

18GHz

N Side

5/8 24UNEF 2A

335V

<1.15





RF Adapter Series Product..

// Product 3D CAD Model Links



RFAA4SMAPNJB3D CAD Model