
RFAA4SMAPNJB Datasheet

Product Name // SMA Plug to N Jack RF Adapter, 4 Hole Flange

View Product Page

* Representative product image only



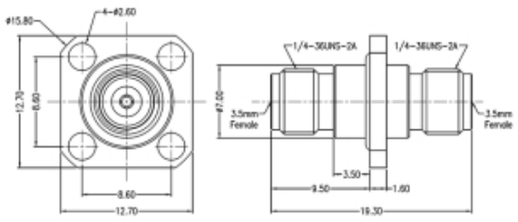

// Product Description:

- SMA Plug to N Jack RF Adapter, 4 Hole Flange
- Maximum Voltage: 335V
- Temperature range: -40°C to +85°C
- Frecuency range: 0GHz - 18GHz
- VSWR: <1.15
- Dielectric withstanding Voltage: >750V
- Impedance: 50Ohm
- Body Material: Stainless Steel Passivation
- Contact Material: Beryllium Copper

// General Information:

Product Display Title:	RF Adapter Series Flange Mount
Product Family:	Radio Frequency Connectors
Product Series:	RF Adapter Series
Body Length:	36.80mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Dielectric Withstanding Voltage:	>750V
Durability:	>500 cycles
Flange Mount Length:	25.40mm
Function:	Male to Female RF Flange Mount Adapter
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	Adapter ASTM D 1710
Max Operating Temperature:	+85°C
Min Operating Temperature:	-40°C
Mount Hole Distance:	18.30mm
Min Operating Frequency:	0GHz
Max Operating Frequency:	18GHz
Seal Position:	N Side
Thread Size:	5/8 24UNEF 2A
Voltage Max:	335V
Vswr:	<1.15

// Product PDF Links

RF Adapter Series Product...

// Product 3D CAD Model Links

RFAA4SMAPNJB3D CAD Model