RFAA4SMAPSMAJ Datasheet




Product Name // SMA Plug to SMA Jack RF Adapter, 4 **Hole Flange**







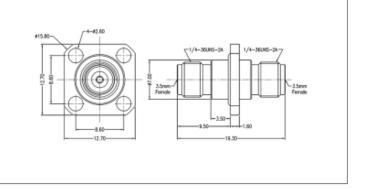

// Product Description:

- 0 SMA Plug to SMA Jack RF Adapter, 4 Hole Flange
- Maximum Voltage: 335V
- 0 Temperature range: -65°C to +165°C
- 0 Frecuency range: 0GHz - 18GHz
- 0 VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title: Product Family: **Product Series:**

Body Length: **Body Material:**

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency: Thread Size:

Voltage Max: Vswr:

RF Adapter Series Flange Mount Radio Frequency Connectors

RF Adapter Series

25.20mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

>750V >500 cycles 17.50mm

Male to Female RF Flange Mount Adapter

50Ohm >5000MOhm

Adapter ASTM D 1710 +165°C

-65°C 12.70mm 0GHz 18GHz 1/4 36UNS 2A

335V <1.15

// Product PDF Links



RF Adapter Series Product.

// Product 3D CAD Model Links



RFAA4SMAPSMAJ3D CAD Model