RFAA4SMAPSMAP Datasheet




Product Name // SMA Plug to SMA Plug RF Adapter, 4 **Hole Flange**







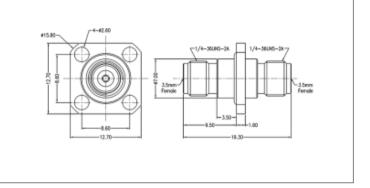

// Product Description:

- 0 SMA Plug to SMA Plug RF Adapter, 4 Hole Flange
- 0 Maximum Voltage: 335V
- 0 Temperature range: -65°C to +165°C
- 0 Frecuency range: 0GHz - 18GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- \cap Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- Contact Material: Beryllium Copper

// General Information:

Product Display Title:

Product Family:

Product Series:

Body Length: Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency:

Voltage Max: Vswr:

RF Adapter Series Flange Mount Radio Frequency Connectors

RF Adapter Series

26.40mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

>750V

>500 cycles

17.50mm

Male to Male RF Flange Mount Adapter

50Ohm

>5000MOhm

Adapter ASTM D 1710

+165°C -65°C 12.70mm 0GHz 18GHz

335V <1.15

// Product PDF Links



RF Adapter Series Product...

// Product 3D CAD Model Links



RFAA4SMAPSMAP3D CAD Model