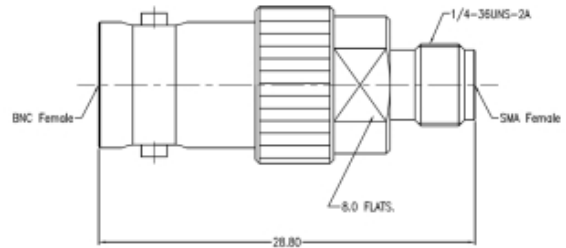


Product Name // BNC Plug to SMA Plug RF Adapter
[View Product Page](#)

* Representative product image only


// Product Description:

- ⊕ BNC Plug to SMA Plug RF Adapter
- ⊕ Maximum Voltage: 335V
- ⊕ Temperature range: -65°C to +165°C
- ⊕ Frequency range: 0GHz - 8GHz
- ⊕ VSWR: <1.15
- ⊕ Dielectric withstanding Voltage: >750V
- ⊕ Impedance: 50Ohm
- ⊕ Body Material: Stainless Steel Passivation
- ⊕ Contact Material: Beryllium Copper

// General Information:

Product Display Title:	RF Adapter Series BNC Straight
Product Family:	Radio Frequency Connectors
Product Series:	RF Adapter Series
Body Length:	28.40mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Dielectric Withstanding Voltage:	>750V
Durability:	>500 cycles
Function:	Male Bayonet to Male RF Adapter
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	Adapter ASTM D 1710
Max Operating Temperature:	+165°C
Min Operating Temperature:	-65°C
Min Operating Frequency:	0GHz
Max Operating Frequency:	8GHz
Voltage Max:	335V
Vswr:	<1.15

// Product PDF Links
[RF Adapter Series Product...](#)
// Product 3D CAD Model Links
[RFAABNCPSMAP3D CAD Model](#)

 Have a question or project enquiry
 you'd like to talk to us about?

[Click Here To Contact Us](#)