## **RFAANPNP Datasheet**




## Product Name // N Plug to N Plug RF Adapter

**View Product Page** 

\* Representative product image only



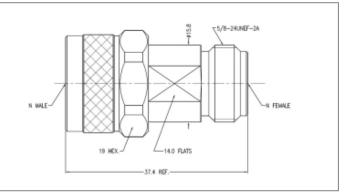

## // Product Description:

- N Plug to N Plug RF Adapter
- Maximum Voltage: 500V
- O Temperature range: -40°C to +85°C
- O Frecuency range: 0GHz 18GHz
- O VSWR: <1.15

- O Dielectric withstanding Voltage: >1500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

## // General Information:

Product Display Title:

Product Family:

Product Series:

Is Vitalis:

Body Length:

**Body Material:** 

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability: Function:

Impedance:

Impedance.

Insulation Resistance:

Insulator:

Max Operating Temperature:

Min Operating Temperature: Min Operating Frequency:

Max Operating Frequency:

Voltage Max:

Vswr:

RF Adapter Series N Type Straight

Radio Frequency Connectors

RF Adapter Series

No

39.60mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

>1500V

>500 cycles

Male to Male RF Adapter

50Ohm

>5000MOhm

UNFILLED ULTEM 1000/PEI

+85°C

-40°C 0GHz

18GHz

500V

<1.15

// Product PDF Links

₽ R

DE Adoutou Coulos Busdunt

// Product 3D CAD Model Links



RFAANPNP3D CAD Model