# **RFABNJNJ Datasheet**




## Product Name // N Jack to N Jack Right Angle RF Adapter

View Product Page

\* Representative product image only



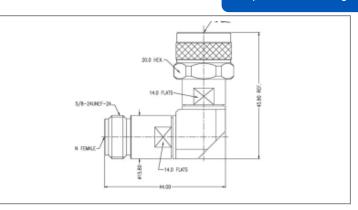

## // Product Description:

- N Jack to N Jack Right Angle RF Adapter
- Maximum Voltage: 500V
- O Temperature range: -40°C to +85°C
- Frecuency range: 0GHz 18GHz
- O VSWR:

- O Dielectric withstanding Voltage: >1500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

## // General Information:

Product Display Title:

Product Family: Product Series:

Body Length:

Body Material:

Centre Contact Retention Force:

Centre Contact Retention Force

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability: Function:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency:

Thread Size: Voltage Max: Vswr: RF Adapter Series Right Angle

Radio Frequency Connectors

RF Adapter Series 44.00mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

>1500V

>500 cycles

Female to Female RF Right Angle Adapter

50Ohm >5000MOhm

UNFILLED ULTEM 1000/PEI

+85°C -40°C 0GHz

18GHz

5/8 24UNEF 2A

500V <1.25

#### // Product PDF Links



RF Adapter Series Product...

#### // Product 3D CAD Model Links



RFABNJNJ3D CAD Model