


RFABNJNJ Datasheet

Product Name // N Jack to N Jack Right Angle RF Adapter

[View Product Page](#)

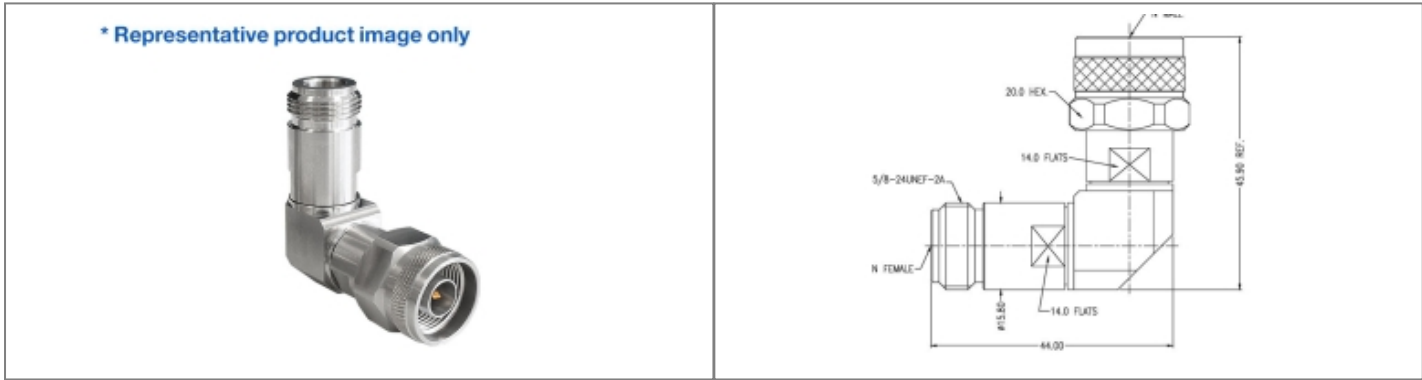

// Product Description:

- ⬢ N Jack to N Jack Right Angle RF Adapter
- ⬢ Maximum Voltage: 500V
- ⬢ Temperature range: -40°C to +85°C
- ⬢ Frequency range: 0GHz - 18GHz
- ⬢ VSWR: <1.25
- ⬢ Dielectric withstanding Voltage: >1500V
- ⬢ Impedance: 50Ohm
- ⬢ Body Material: Stainless Steel Passivation
- ⬢ Contact Material: Beryllium Copper

// General Information:

| | |
|-----------------------------------------|-----------------------------------------|
| Product Display Title: | RF Adapter Series Right Angle |
| Product Family: | Radio Frequency Connectors |
| Product Series: | RF Adapter Series |
| Body Length: | 44.00mm |
| Body Material: | Stainless Steel Passivation |
| Centre Contact Retention Force: | >26.7N |
| Contact Pin Material: | Beryllium Copper |
| Dielectric Withstanding Voltage: | >1500V |
| Durability: | >500 cycles |
| Function: | Female to Female RF Right Angle Adapter |
| Impedance: | 50Ohm |
| Insulation Resistance: | >5000MOhm |
| Insulator: | UNFILLED ULTEM 1000/PEI |
| Max Operating Temperature: | +85°C |
| Min Operating Temperature: | -40°C |
| Min Operating Frequency: | 0GHz |
| Max Operating Frequency: | 18GHz |
| Thread Size: | 5/8 24UNEF 2A |
| Voltage Max: | 500V |
| Vswr: | <1.25 |

// Product PDF Links

[RF Adapter Series Product...](#)

// Product 3D CAD Model Links

[RFABNJNJ3D CAD Model](#)