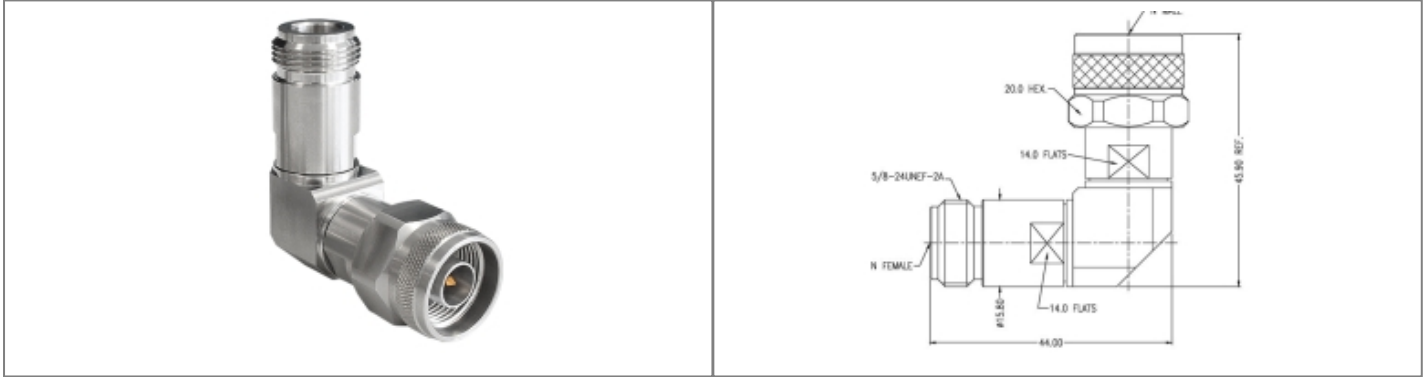


RFABNJNP Datasheet

Product Name // N Jack to N Plug Right Angle RF Adapter

[View Product Page](#)


// Product Description:

- ⬢ N Jack to N Plug Right Angle RF Adapter
- ⬢ Maximum Voltage: 500V
- ⬢ Temperature range: -40°C to +85°C
- ⬢ Frequency range: 0GHz - 18GHz
- ⬢ VSWR: <1.25
- ⬢ Dielectric withstanding Voltage: >1500V
- ⬢ Impedance: 50Ohm
- ⬢ Body Material: Stainless Steel Passivation
- ⬢ Contact Material: Beryllium Copper

// General Information:

Product Display Title:	RF Adapter Series Right Angle
Product Family:	Radio Frequency Connectors
Product Series:	RF Adapter Series
Body Length:	44.00mm & 45.90mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Dielectric Withstanding Voltage:	>1500V
Durability:	>500 cycles
Function:	Male to Female RF Right Angle Adapter
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	UNFILLED ULTEM 1000/PEI
Max Operating Temperature:	+85°C
Min Operating Temperature:	-40°C
Min Operating Frequency:	0GHz
Max Operating Frequency:	18GHz
Thread Size:	5/8 24UNEF 2A
Voltage Max:	500V
Vswr:	<1.25

// Product PDF Links

[RF Adapter Series Product...](#)

// Product 3D CAD Model Links

[RFABNJNP3D CAD Model](#)