
# **RFABNJNP Datasheet**



## Product Name // N Jack to N Plug Right Angle RF Adapter

View Product Page



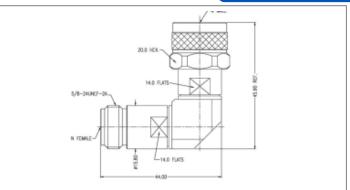

#### **Product Description:**

- 0 N Jack to N Plug Right Angle RF Adapter
- 0 Maximum Voltage: 500V
- 0 Temperature range: -40°C to +85°C
- 0 Frecuency range: 0GHz - 18GHz
- 0 VSWR: <1.25

- 0 Dielectric withstanding Voltage: >1500V
- O Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- Contact Material: Beryllium Copper

## // General Information:

**Product Display Title:** 

**Product Family:** 

**Product Series: Body Length:** 

**Body Material:** 

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability:

Function:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Min Operating Frequency:

Max Operating Frequency:

Voltage Max:

Vswr:

RF Adapter Series Right Angle

Radio Frequency Connectors

**RF Adapter Series** 

44.00mm & 45.90mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

>1500V

>500 cycles

Male to Female RF Right Angle Adapter

50Ohm

>5000MOhm

UNFILLED ULTEM 1000/PEI

+85°C -40°C

0GHz

18GHz

5/8 24UNEF 2A

500V

<1.25

## // Product PDF Links



## // Product 3D CAD Model Links



RFABNJNP3D CAD Model