


**Product Name // N Jack Straight 4 Hole Flange RF Connector**
 [View Product Page](#)

\* Representative product image only

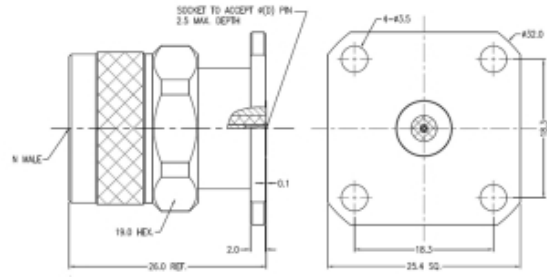

## // Product Description:

- ⊞ N Jack Straight 4 Hole Flange RF Connector
- ⊞ Maximum Voltage: 500V
- ⊞ Temperature range: -55°C to +155°C
- ⊞ Frequency range: 0GHz - 18GHz
- ⊞ VSWR:
- ⊞ Dielectric withstanding Voltage: >1500V
- ⊞ Impedance: 50Ohm
- ⊞ Body Material: Stainless Steel Passivation
- ⊞ Contact Material: Beryllium Copper

## // General Information:

Product Display Title:	N Type Series Socket 4 Hole Flange
Product Family:	Radio Frequency Connectors
Product Series:	N Type Series
Body Length:	19.00mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Min Coupling Torque:	0.80Nm
Max Coupling Torque:	1.10Nm
Dielectric Withstanding Voltage:	>1500V
Durability:	>500 cycles
Flange Mount Length:	12.70mm
Function:	Female Flange Mount RF Connector
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	Adapter ASTM D 1710 & PEI
Max Operating Temperature:	+155°C
Min Operating Temperature:	-55°C
Mount Hole Distance:	8.60mm
Min Operating Frequency:	0GHz
Max Operating Frequency:	18GHz
Socket Diameter:	0.51mm
Thread Size:	5/8 24UNEF 2A
Voltage Max:	500V
Vswr:	<1.30

## // Product PDF Links

 [N Type Series Product Datasheet](#)

## // Product 3D CAD Model Links

 [RFNA4JCCE3D CAD Model](#)

 Have a question or project enquiry  
 you'd like to talk to us about?

[Click Here To Contact Us](#)