RFNA4JCCMF Datasheet




Product Name // N Jack Straight 4 Hole Flange RF Connector

View Product Page

* Representative product image only



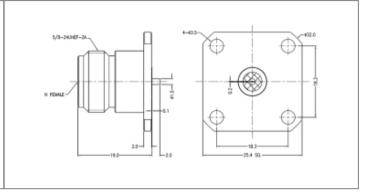

// Product Description:

- O N Jack Straight 4 Hole Flange RF Connector
- Maximum Voltage: 500V
- O Temperature range: -55°C to +155°C
- O Frecuency range: 0GHz 18GHz
- O VSWR:

- O Dielectric withstanding Voltage: >1500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title:

Product Family:

Product Series: Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature:

Mount Hole Distance: Min Operating Frequency: Max Operating Frequency:

Pin Diameter: Pin Length: Thread Size: Voltage Max:

Vswr:

N Type Series Pin without Extended PTFE 4 Hole Flange

Radio Frequency Connectors

N Type Series

19.00mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

0.80Nm 1.10Nm

>1500V

>500 cycles

12.70mm

Female Flange Mount RF Connector

50Ohm

>5000MOhm

Adapter ASTM D 1710 & PEI

+155°C -55°C 8.60mm 0GHz

18GHz 1.50mm 2.00mm 5/8 24UNEF 2A

500V <1.30

// Product PDF Links



N Type Series Product Datasheet

// Product 3D CAD Model Links



RFNA4JCCMF3D CAD Model