RFNA4JGILGIE Datasheet




Product Name // N Jack Straight 4 Hole Flange RF Connector

View Product Page

* Representative product image only



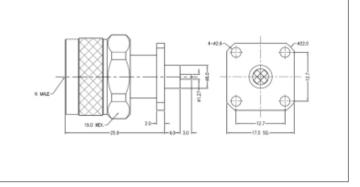

// Product Description:

- O N Jack Straight 4 Hole Flange RF Connector
- Maximum Voltage: 500V
- O Temperature range: -55°C to +155°C
- Frecuency range: 0GHz 18GHz
- O VSWR: <1.30

- O Dielectric withstanding Voltage: >1500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title:

Product Family:

Product Series:

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function:

Impedance:
Insulation Resistance:

Insulator:

Max Operating Temperature:

Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency:

Pin Diameter: Pin Length: Ptfe Diameter: Ptfe Length: Thread Size: Voltage Max:

Vswr:

N Type Series Pin with Extended PTFE 4 Hole Flange

Radio Frequency Connectors

N Type Series

19.00mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

0.80Nm

1.10Nm >1500V

>500 cycles

25.40mm

Female Flange Mount RF Connector

50Ohm

>5000MOhm

Adapter ASTM D 1710 & PEI

+155°C -55°C 18.30mm 0GHz 18GHz 1.27mm

3.00mm 6.00mm 4.00mm

5/8 24UNEF 2A

500V <1.30

// Product PDF Links



// Product 3D CAD Model Links

