# **RFNA4PFHD Datasheet**




## Product Name // N Plug Straight 4 Hole Flange RF Connector



#### \* Representative product image only



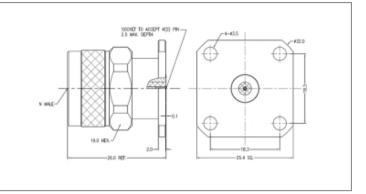

### // Product Description:

- O N Plug Straight 4 Hole Flange RF Connector
- 0 Maximum Voltage: 500V
- 0 Temperature range: -55°C to +155°C
- 0 Frecuency range: 0GHz - 18GHz
- 0 VSWR:

- Ò Dielectric withstanding Voltage: >1500V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- Contact Material: Beryllium Copper

#### // General Information:

**Product Display Title:** 

**Product Family:** 

**Product Series:** Body Length:

**Body Material:** 

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque:

Max Coupling Torque:

Dielectric Withstanding Voltage:

**Durability:** 

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency: Socket Diameter:

Voltage Max: Vswr:

N Type Series Socket 4 Hole Flange

Radio Frequency Connectors

N Type Series

26.00mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

0.80Nm

1.10Nm >1500V

>500 cycles

17.50mm

Male Flange Mount RF Connector

50Ohm

>5000MOhm

Adapter ASTM D 1710 & PEI

+155°C -55°C

12.70mm

0GHz

18GHz

0.46mm

500V <1.30

// Product PDF Links

N Type Series Product Datasheet

// Product 3D CAD Model Links

RFNA4PFHD3D CAD Model

1