


RFNA4PFHD Datasheet

Product Name // N Plug Straight 4 Hole Flange RF Connector

 [View Product Page](#)

* Representative product image only

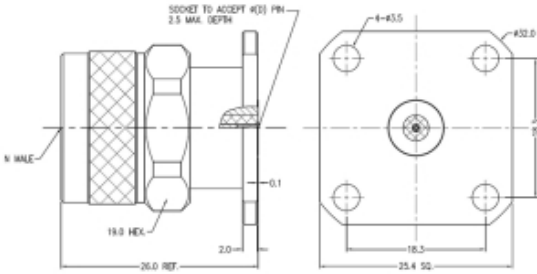

// Product Description:

- | | |
|--|---|
| <ul style="list-style-type: none">N Plug Straight 4 Hole Flange RF ConnectorMaximum Voltage: 500VTemperature range: -55°C to +155°CFrequency range: 0GHz - 18GHzVSWR: <1.30 | <ul style="list-style-type: none">Dielectric withstanding Voltage: >1500VImpedance: 50OhmBody Material: Stainless Steel PassivationContact Material: Beryllium Copper |
|--|---|

// General Information:

Product Display Title:	N Type Series Socket 4 Hole Flange
Product Family:	Radio Frequency Connectors
Product Series:	N Type Series
Body Length:	26.00mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Min Coupling Torque:	0.80Nm
Max Coupling Torque:	1.10Nm
Dielectric Withstanding Voltage:	>1500V
Durability:	>500 cycles
Flange Mount Length:	17.50mm
Function:	Male Flange Mount RF Connector
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	Adapter ASTM D 1710 & PEI
Max Operating Temperature:	+155°C
Min Operating Temperature:	-55°C
Mount Hole Distance:	12.70mm
Min Operating Frequency:	0GHz
Max Operating Frequency:	18GHz
Socket Diameter:	0.46mm
Voltage Max:	500V
Vswr:	<1.30

// Product PDF Links



N Type Series Product Datasheet

// Product 3D CAD Model Links



RFNA4PFHD3D CAD Model



Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)