
RFNA4PFHMF Datasheet



Product Name // N Plug Straight 4 Hole Flange RF Connector





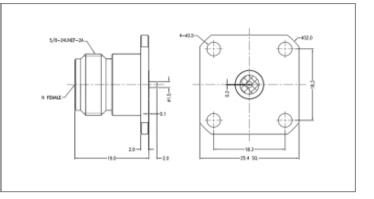

// Product Description:

- O N Plug Straight 4 Hole Flange RF Connector
- O Maximum Voltage: 500V
- O Temperature range: -55°C to +155°C
- O Frecuency range: 0GHz 18GHz
- O VSWR: <1.30

- O Dielectric withstanding Voltage: >1500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title: N Type Series Pin without Extended PTFE 4 Hole Flange

Product Family: Radio Frequency Connectors

Product Series: N Type Series

Is Vitalis: No Body Length: 26.00mm

Body Material: Stainless Steel Passivation
Centre Contact Retention Force: >26.7N

Contact Pin Material: Beryllium Copper Min Coupling Torque: 0.80Nm

Max Coupling Torque:1.10NmDielectric Withstanding Voltage:>1500V

Durability:>500 cyclesFlange Mount Length:17.50mm

Function:Male Flange Mount RF ConnectorImpedance:500hm

Insulation Resistance:>5000MOhmInsulator:Adapter ASTM D 1710 & PEI

Max Operating Temperature:

Min Operating Temperature:

Mount Hole Distance:

Min Operating Frequency:

Min Operating Frequency:

Max Operating Frequency:

18GHz

Max Operating Frequency:

Pin Diameter:

Pin Length:

Voltage Max:

Vswr:

186

2.00


Vswr:

41.50

12.70mn 0GHz 18GHz 1.50mm 2.00mm 500V <1.30

// Product PDF Links







RFNA4PFHMF3D CAD Model