
RFNA4PFHMF Datasheet



Product Name // N Plug Straight 4 Hole Flange RF Connector





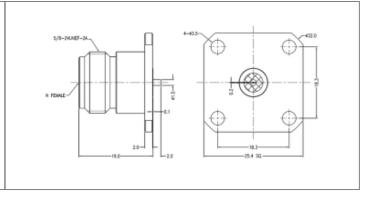

// Product Description:

- N Plug Straight 4 Hole Flange RF Connector
- Maximum Voltage: 500V
- 0 Temperature range: -55°C to +155°C
- Frecuency range: 0GHz 18GHz
- 0 VSWR:

Function:

- O Dielectric withstanding Voltage: >1500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

General Information:

Product Display Title: N Type Series Pin without Extended PTFE 4 Hole Flange

Product Family: Radio Frequency Connectors N Type Series

Product Series: Body Length: 26.00mm

Body Material: Stainless Steel Passivation Centre Contact Retention Force: >26.7N

Contact Pin Material: Beryllium Copper Min Coupling Torque: 0.80Nm 1.10Nm Max Coupling Torque:

Dielectric Withstanding Voltage: >1500V

Durability: >500 cycles Flange Mount Length: 17.50mm

Male Flange Mount RF Connector Impedance: 50Ohm >5000MOhm Insulation Resistance:

Insulator: Adapter ASTM D 1710 & PEI +155°C Max Operating Temperature:

-55°C Min Operating Temperature: Mount Hole Distance: 12.70mm 0GHz Min Operating Frequency: 18GHz Max Operating Frequency: 1.50mm

Pin Diameter: Pin Length: 2.00mm Voltage Max: 500V Vswr: <1.30

// Product PDF Links // Product 3D CAD Model Links

N Type Series Product Datasheet

RFNA4PFHMF3D CAD Model